

Amber Govern T200

Professional GNSS/GSM Terminal



Dual SIM – significantly reduce roaming costs



Allows device to work without external power source



Remote tachograph data download



1-Wire® interface to monitor temperature data and RFID/iButton tags



CAN data reading from vehicles and specialized transport



RS232/RS485 serial communication interfaces

LEADING GNSS/GSM TERMINAL FOR PROFESSIONAL APPLICATIONS

AGT 200 is GNSS, GSM terminal for PROFESSIONAL applications. AGT 200 is designed for complex solutions, where one device can do multiple tasks. AGT 200 features like FMS CAN data (J1939), fuel CAN data (J1708), tachograph live data (K-Line), remote tachograph file download, various third party RS232 or RS485 devices support and Dual-SIM will maximize your fleet efficiency. Terminal is suitable for applications like international logistics, refrigerated transport, agriculture, construction & mining, security & emergency services and even more.

Use Cases



Construction and Mining



Heavy Duty Transport



Public Safety Services





Refrigerated Transport



International Logistics



Agriculture Transport

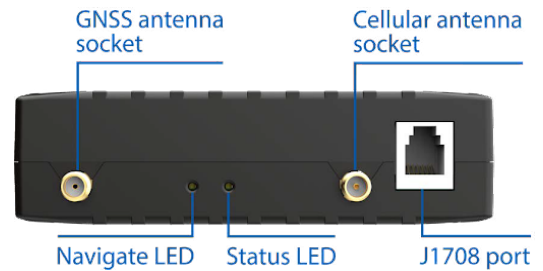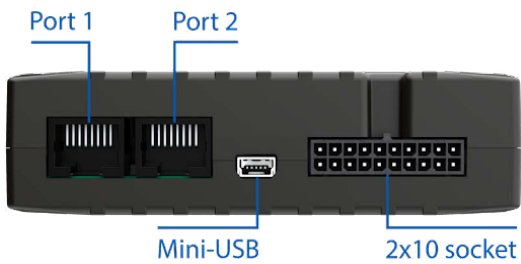

Module

Name	AGT 200
Technology	GSM/GPRS/GNSS

GNSS

GNSS	GPS, GLONASS, GALILEO, BEIDOU, SBAS, QZSS, DGPS
Receiver	33/99 acquisition channels
Tracking sensitivity	-165 dBm
Position accuracy	< 2.5 CEP
Velocity accuracy	<0.1m/s (within +/- 15% error)
Hot start	< 1 s
Warm start	< 25 s
Cold start	< 35 s

Cellular

Technology	GSM/GPRS
2G	Quad-band 850 / 900 / 1800 / 1900 MHz
GPRS	GPRS Mobile Station Class B
Data transfer	GPRS Multi-Slot Class 12(up to 240 kbps)
Data support	SMS (text/data)

Power

Input voltage range	10 - 30 V DC with overvoltage protection
Internal Back-up battery	550 mAh Ni-Mh, 8.4 V battery

Power Consumption

At 12V < 7 mA	Deep Sleep
At 12V < 12 mA	Online Deep Sleep
At 12V < 28 mA	GPS Sleep
At 12V < 65mA	Nominal with no load
At 12V < 120 mA	GPRS

Physical specification

Dimensions	104.1 × 76.8 × 31.5 mm (L x W x H)
Weight	197 g

Operating environment

Operating temperature (without battery)	-40 °C to +85 °C
Storage temperature (without battery)	-40 °C to +85 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP41
Battery storage temperature	-20 °C to +45°C

Interface

Digital Inputs	4
Digital Outputs	4
Analog Inputs	4
1-Wire	1
RS232	2
RS485	1
CAN J1939	2
J1708	1
K-line	1
GNSS antenna	External High Gain
GSM antenna	External High Gain
USB	2.0 Mini-USB
LED indication	2 status LED lights
SIM	2× SIM Card (Dual-SIM)
Memory	2 MB internal flash memory and external Micro SD card up to 32GB

Features

Sensors	Accelerometer
Scenarios	Green/Eco Driving, Over Speeding detection, Jamming detection, Excessive Idling detection, Towing detection, Crash detection, Immobilizer, iButton Read Notification, Auto Geofencing, Manual Geofencing, Trip detection, Odometer, Fuel counter, GNSS Unplug Detection, DDD download and Tacho online data, Offline tracking, Voice call
Supported peripherals	RFID RS232, RFID 1-Wire, iButton 1-Wire, Temperature 1-Wire, Continental tire pressure measurement sensor
Sleep modes	GPS Sleep, Online Deep Sleep, Deep Sleep
Configuration and firmware update	FOTA Web, FOTA, Amber Configurator
SMS	Configuration, Events, DOUT control, Debug
GPRS commands	Configuration, DOUT control, Debug
Time Synchronization	GNSS, NITZ, NTP
Fuel monitoring	LLS (Analog), Digital LLS (RS232, RS485), LV-CAN200, ALL-CAN300, CAN-CONTROL, CAN FMS (J1939, J1708), Ultrasonic level sensor
Ignition detection	Digital Input, Accelerometer, External Power Voltage
RS232 Modes	Log Mode, NMEA, LLS, LCD, RFID HID/MF7, Garmin FMI, TCP ASCII/Binary, TCP ASCII/Binary (Buffered), Rec to LCD, Atol Tachograph, UL202-2 Fuel Sensor, TSM232 Sattelite backup, Carrier Freezer
RS485 Modes	Silent, Log Mode, NMEA, LLS, TCP ASCII/Binary, TCP ASCII/Binary (Buffered)

Certification & Approvals

Regulatory

CE/RED, E-Mark, EAC, RoHS, REACH, Anatel

Need help? Contact 24/7 live support!

 In App Chat

 support@amberconnect.com

 Chat via website www.amberconnect.com

Works with Android phones and tablets, iPhone, iPad.

Compatible with Chrome, Mac and PC web browsers.



Amber Connect

Scan this QR code to download your App

©2024 Amber Connect Limited. All rights reserved.